

EzeeRip®

PLUS



EzeeRip-Plus is manufactured from a robust **60-micron High Tensile Polypropylene (HTPP)** film and coated with a pressure-sensitive adhesive. Its exceptional **cross-tear strength** makes it ideal for solid fiber board applications i.e. thicker document mailers, soap powder cartons etc.

PRODUCT INFORMATION

Key Features


- **Superior Cross-Direction Strength:** Ezeerip-Plus tear tape has a greater cross-direction strength and hence, it is highly flexible and resistant to breaking. It behaves more like rubber, offering tough resistance to tearing, even under stress.
- **Enhanced Durability:** Ezeerip-Plus provides exceptional performance when pulled at a right angle (close to 90°)
- **Reliable for Cross-Tear Applications:** With its strength in both machine and cross directions, Ezeerip-Plus is the ideal choice for packaging that requires durability and ease of opening. Ezeerip-Plus ensures consistent performance across all dimensions, reducing the risk of breakage during handling and shipping.

Key Application Areas

- Perfect for **thicker document mailers made from solid fiberboard**, where durability and cross-tear strength are essential.
- Packaging for heavy-duty items such as **soap powder cartons, ready-to-assemble furniture cartons**, etc.

Standard Put-ups

Backing:	HTPP
Adhesive:	Water-based Acrylic
Adhesive Activation:	Pressure Sensitive
Thickness:	60 µm
Width:	3mm to 25mm
Length:	Upto 40km
Core ID:	152mm
Wounding:	Traverse wound
Print:	Optional

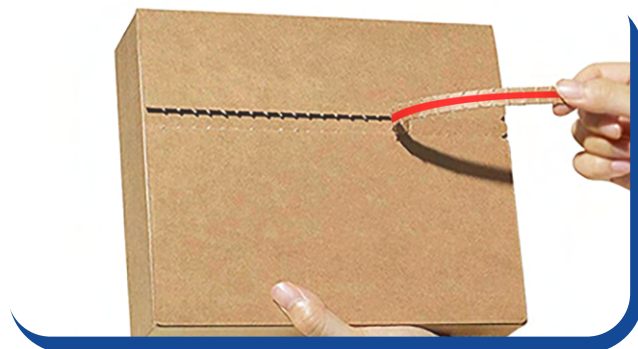

Standard Colors



TECHNICAL SPECIFICATIONS

Properties	Test Method	Unit	Specification	
Tape Width Tolerance	Bagla Internal Method	mm	± 0.1	
Total tape thickness	AFERA 5006	µm	85 ± 10	
Film Thickness	AFERA 5006	µm	60 ± 5	
Glue Thickness	AFERA 5006	µm	25 ± 2	
Breaking Strength	AFERA 5004	N/cm	≥52	
Elongation at Break	AFERA 5004	%	≥30	
Tensile Strength at Break	MD	AFERA 5004	kgf/mm ²	≥18
	CD	AFERA 5004	kgf/mm ²	≥18
Peel Adhesion to Stainless Steel	FINAT FTM 1	gf/25mm	≥800	
Loop Tack to Glass	FINAT FTM 9	gf/25mm	≥800	

Why Choose Bagla Group Tear Tapes?

- Monthly capacity of more than 1 million kilometres of tear tapes.
- New strategic factory locations in Indonesia & Paraguay as well with readily available stock.
- 10 fast speed European spooling machines.
- International raw material suppliers.
- Flexible and fast production time.
- All colours, lines, dots, and printing of upto 6 colours available.
- Sustainable options available.
- Personalised service and technical experts available for all your queries.



ADDITIONAL INFORMATION

SHELF LIFE: The standard shelf life is 36 months from the date of manufacture. However, this depends on several factors such as storage conditions, handling etc.

DISPOSAL: Preferred options for disposal are: (1) recycling, SPI Code 7; (2) incineration with energy recovery; and (3) land fill.

STORAGE: Storage below 32°C (90°F) is recommended.

DISCLAIMER: The technical data contained herein are guides to the use of Bagla® products. Bagla Group makes no guarantees of results and assumes no obligations or liability in connection with its advice.

Head Office

- New Delhi, Delhi

Domestic Sales Office

- Delhi • Mumbai • Kolkata • Cochin
- Bangalore • Hyderabad • Chennai • Bhopal

Factories

- 3 in Mundra, Gujarat, India
- 2 in Roorkee, Uttar Pradesh, India
- 1 in Ghaziabad, Uttar Pradesh, India

International Sales Office

- Spain • USA • Australia • United Kingdom
- Argentina • South Africa • Egypt
- Poland • Germany • Canada